


MIDDLE LED - ALIGNED

series: MIDDLE



Led lights

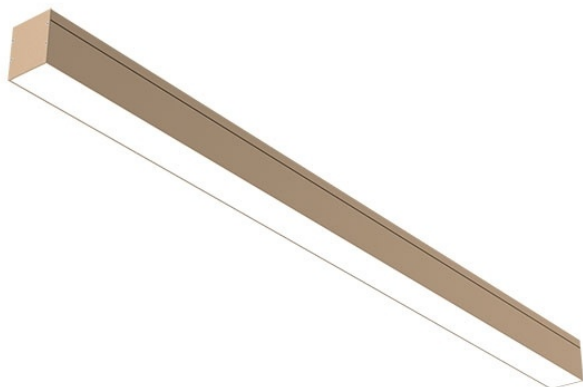

Direct



IP 20



Surface mounted

2814 × 75 × 88 mm

Design surface mounted or suspended LED luminaires
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code

0-105373.20A

Optics

acrylic satin diffuser

Dimension a

2814 mm

Dimension c

88 mm

Total power consumption

114 W

Color temperature

4000 K

Mounting type

surface mounted, suspended

Weight

5.1 kg

Driver

DALI / SwitchDim

Colour

gray biege

Dimension b

75 mm

Type of light source

LED

Luminous flux

15970 lm

Color index (RA)

80

Cover

IP 20

Photometry

