


MIDDLE LED - EXTENDED

series: MIDDLE



Led lights

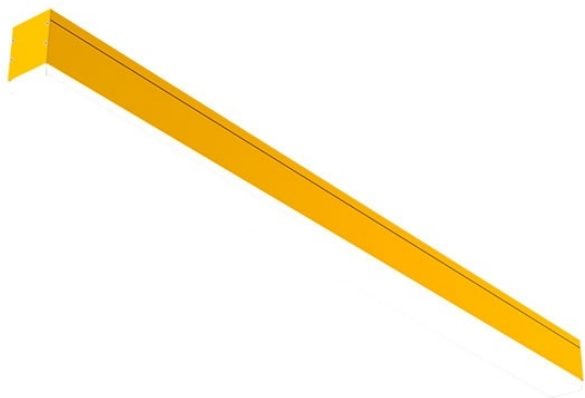

Direct



IP 20



Surface mounted

1410 × 75 × 88 mm

Design surface mounted or suspended LED luminaires
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105759.20T

Optics
acrylic satin diffuser

Dimension a
1410 mm

Dimension c
88 mm

Total power consumption
29 W

Color temperature
4000 K

Mounting type
surface mounted, suspended

Cover
IP 20

Driver
DALI / SwitchDim

Colour
traffic yellow

Dimension b
75 mm

Type of light source
LED

Luminous flux
4170 lm

Color index (RA)
80

Note
Extended plexi

Weight
2.6 kg

Photometry

