

AERRO V LED

series: AERRO



 Led lights

 Direct

 IP 20

 Recessed

595 × 595 × 65 mm

- Office LED luminaire for panel false ceilings
- Optical systems for glare reduction UGR < 19
- Dimensions for M6000 and M625
- Colour temperature 3000K, 4000K, 5000K
- The luminaire can be equipped with an emergency power supply
- Designed solely for upper mounting
- Maintenance of LED 50 000h/L70
- 5 years warranty

Product description

Product code
0-241007.000

Optics
acrylic satin diffuser

Dimension a
595 mm

Dimension c
65 mm

Type of light source
LED

Luminous flux
3540 lm

Color index (RA)
80

Note
M600

Driver
EVG

Colour
white

Dimension b
595 mm


Ceiling recessed
M600

Total power consumption
26 W

Color temperature
4000 K

Mounting type
recessed,

Cover
IP 20

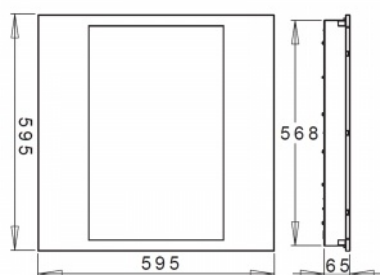

Photometry

AERRO V LED - 595 x 595 x 65 mm

