



AERRO VI LED - MONO SQ

series: AERRO

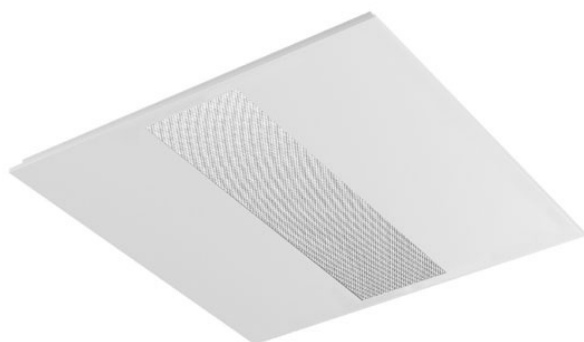

595 × 595 × 25 mm

Recessed office LED luminaire

The construction of luminaire designed for compartment ceiling M600 and M625

Body of luminaire made of white powder coated steel sheet (RAL 9003)

L80/B20 > 60000h


Diffuser made of microprism PMMA or polished MIRO louver

Diffusing systems meet the glare reducing level UGR < 19

Colour temperature 4000k, other temperatures on request

Luminaire equipped with electronic or dimmable electronic ballast

Usage: offices, schools, interior of buildings, commercial rooms, other interiors

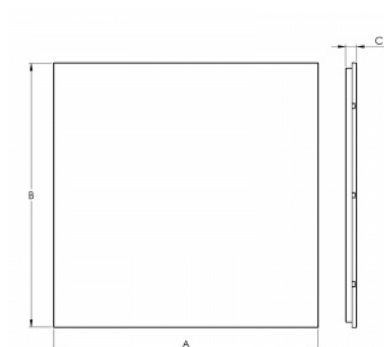

Product description

Product code
0-258017.010

Optics
Microprismatic diffuser

Dimension a
595 mm

Dimension c
25 mm

Total power consumption
41 W

Color temperature
4000 K

Mounting type
recessed,

Weight
4 kg

Driver
EVG

Colour
white

Dimension b
595 mm

Type of light source
LED

Luminous flux
5120 lm

Color index (RA)
80

Cover
IP 20

Photometry

AERRO VI LED - MONO SQ - 595 x 595 x 25 mm

