

AERRO VI LED - MONO LONG

series: AERRO

 Led lights

 IP 20

 Recessed

1195 × 295 × 25 mm

Recessed office LED luminaire

The construction of luminaire designed for compartment ceiling M600 and M625

Body of luminaire made of white powder coated steel sheet (RAL 9003)

L80/B20 > 60000h

Diffuser made of microprism PMMA

Diffusing systems meet the glare reducing level UGR < 19

Colour temperature 4000k, other temperatures on request

Luminaire equipped with electronic or dimmable electronic ballast

Usage: offices, schools, interior of buildings, commercial rooms, other interiors

Product description

Product code

0-258025.010

Driver

EVG

Optics

Microprismatic diffuser

Colour

white

Dimension a

1195 mm

Dimension b

295 mm

Dimension c

25 mm

Type of light source

LED

Total power consumption

41 W

Luminous flux

5120 lm

Color temperature

4000 K

Color index (RA)

80

Mounting type


recessed,

Cover

IP 20

Weight

4.3 kg

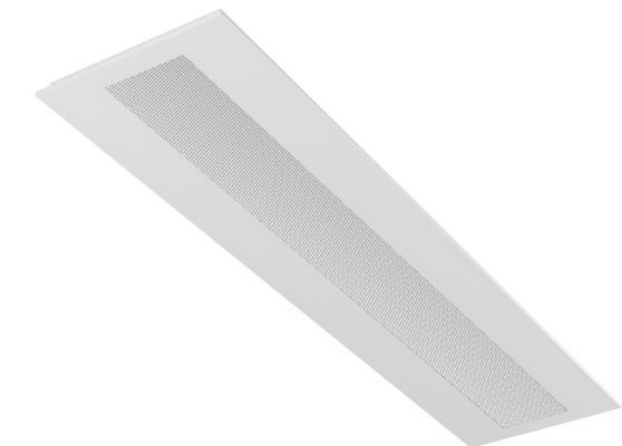

Photometry

AERRO VI LED - MONO LONG - 1195 x 295 x 25 mm

