


## AERRO VI LED - MONO SQ

series: AERRO



**620 × 620 × 25 mm**

Recessed office LED luminaire

The construction of luminaire designed for compartment ceiling M600 and M625

Body of luminaire made of white powder coated steel sheet (RAL 9003)

L80/B20 > 60000h


Diffuser made of microprism PMMA or polished MIRO louver

Diffusing systems meet the glare reducing level UGR < 19

Colour temperature 4000k, other temperatures on request

Luminaire equipped with electronic or dimmable electronic ballast

Usage: offices, schools, interior of buildings, commercial rooms, other interiors

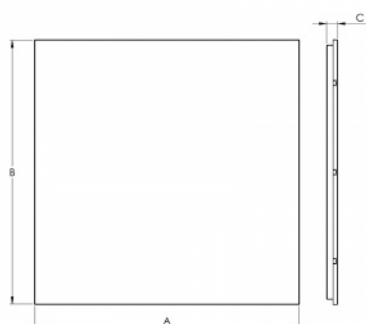

### Product description

Product code

**0-258117.010**

Driver

**EVG**

Optics

**Microprismatic diffuser**

Colour

**white**

Dimension a

**620 mm**

Dimension b

**620 mm**

Dimension c

**25 mm**

Type of light source

**LED**

Total power consumption

**41 W**

Luminous flux

**5120 lm**

Color temperature

**4000 K**

Color index (RA)

**80**

Mounting type

**recessed,**

Cover

**IP 20**

Weight

**4.3 kg**

### Photometry

AERRO VI LED - MONO SQ - 620 x 620 x 25 mm

