



SIDDELIGHT RECESSED LED

series: SIDDELIGHT



595 × 595 × 15 mm

Recessed LED luminaire with LGP(Light Guide Panel) technology designed for indoor lighting
Construction of luminaire designed for compartment ceiling M600 and M625 or plasterboard
Body made of slim powder coated aluminium profile
Diffuser made of "slim opal" or "slim prism" with high glare limitation
Luminaire equipped with electronic or dimmable electronic ballast
Possibility to fit the emergency module
Usage: offices, schools, interior of buildings, commercial rooms, other interiors
Accessories to be ordered separately

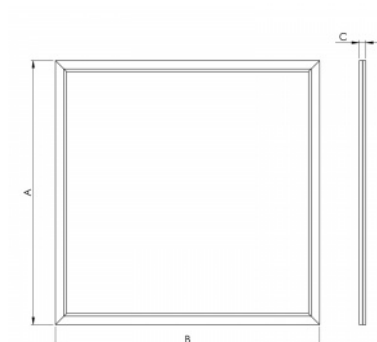

Product description

Product code
0-264003.080

Optics
Slim opal

Dimension a
595 mm

Dimension c
15 mm

Type of light source
LED

Luminous flux
5240 lm

Color index (RA)
80

Cover
IP 20

Driver
EVG

Colour
white

Dimension b
595 mm

Ceiling recessed
585x585

Total power consumption
36 W

Color temperature
4000 K

Mounting type
recessed,

Weight
4.6 kg

Photometry

