

SIDDELIGHT LED

series: SIDDELIGHT



Led lights



IP 20




Surface mounted

595 × 595 × 49 mm

- LED luminaire with LGP (Light Guide Panel) technology designed for indoor lighting
- Construction of luminaire suitable for suspended or surfaced mounting
- Body of luminaire made of powder coated slim aluminium profile
- Diffuser made of "slim opal" or "slim prism" for high glare limitation
- Luminaire equipped with electronic or dimmable electronic ballast
- Possibility to fit an emergency module
- Usage: offices, schools, interiors of buildings, commercial rooms, other interiors
- Accessories to be ordered separately

Product description

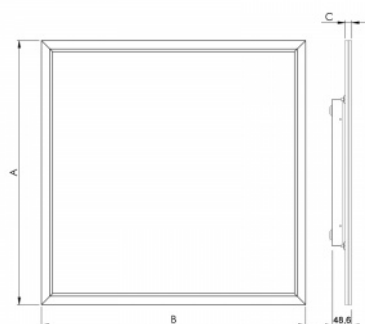

Product code
0-264104.080

Driver
EVG

Optics
Slim opal

Colour
white

Dimension a
595 mm

Dimension b
595 mm

Dimension c
49 mm

Type of light source
LED

Total power consumption
41 W

Luminous flux
5660 lm

Color temperature
3000 K

Color index (RA)
80

Mounting type
surface mounted, suspended

Cover
IP 20

Weight
4.8 kg

Photometry

