

SIDDELIGHT RECESSED LED LO

series: SIDDELIGHT



LED Led lights

IP 20 IP 20

Recessed Recessed

1195 × 295 × 15 mm

Recessed LED luminaire with LGP(Light Guide Panel) technology designed for indoor lighting

Construction of luminaire designed for compartment ceiling M600 and M625 or plasterboard

Body made of slim powder coated aluminium profile


Diffuser made of "slim opal" or "slim prism" with high glare limitation

Luminaire equipped with electronic or dimmable electronic ballast

Possibility to fit the emergency module

Usage: offices, schools, interior of buildings, commercial rooms, other interiors

Accessories to be ordered separately

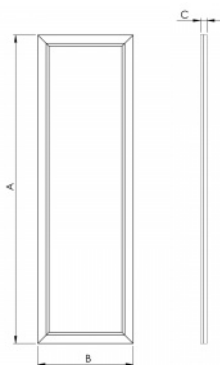

Product description

Product code
0-264305.080

Optics
Slim opal

Dimension a
1195 mm

Dimension c
15 mm

Type of light source
LED

Luminous flux
5928 lm

Color index (RA)
80

Cover
IP 20

Driver
EVG

Colour
white

Dimension b
295 mm

Ceiling recessed
1185x285

Total power consumption
41 W

Color temperature
4000 K

Mounting type
recessed,

Weight
5.1 kg

Photometry

