

## SIDDELIGHT LED LO

series: SIDDELIGHT



Led lights



IP 20



Surface mounted

**1195 × 295 × 49 mm**

- LED luminaire with LGP (Light Guide Panel) technology designed for indoor lighting
- Construction of luminaire suitable for suspended or surfaced mounting
- Body of luminaire made of powder coated slim aluminium profile
- Diffuser made of "slim opal" or "slim prism" for high glare limitation
- Luminaire equipped with electronic or dimmable electronic ballast
- Possibility to fit an emergency module
- Usage: offices, schools, interiors of buildings, commercial rooms, other interiors
- Accessories to be ordered separately

### Product description

Product code  
**0-264500.080**

Optics  
**Slim opal**

Dimension a  
**1195 mm**

Dimension c  
**49 mm**

Total power consumption  
**25 W**

Color temperature  
**3000 K**

Mounting type  
**surface mounted, suspended**

Weight  
**5.1 kg**

Driver  
**EVG**

Colour  
**white**


Dimension b  
**295 mm**

Type of light source  
**LED**

Luminous flux  
**3644 lm**

Color index (RA)  
**80**

Cover  
**IP 20**

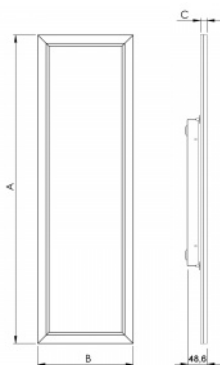

### Photometry

