



SIDDELIGHT LED LO

series: SIDDELIGHT



1195 × 295 × 49 mm

- LED luminaire with LGP (Light Guide Panel) technology designed for indoor lighting
- Construction of luminaire suitable for suspended or surfaced mounting
- Body of luminaire made of powder coated slim aluminium profile
- Diffuser made of “slim opal” or “slim prism” for high glare limitation
- Luminaire equipped with electronic or dimmable electronic ballast
- Possibility to fit an emergency module
- Usage: offices, schools, interiors of buildings, commercial rooms, other interiors
- Accessories to be ordered separately

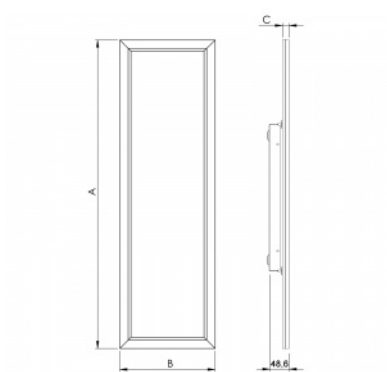

Photometry



Product description

Product code	Driver
0-264502.080	EVG
Optics	Colour
Slim opal	white
Dimension a	Dimension b
1195 mm	295 mm
Dimension c	Type of light source
49 mm	LED
Total power consumption	Luminous flux
36 W	5004 lm
Color temperature	Color index (RA)
3000 K	80
Mounting type	Cover
surface mounted, suspended	IP 20
Weight	
5.1 kg	