

SIDDELIGHT LED LO

series: SIDDELIGHT



Led lights



IP 20



Surface mounted

1195 × 295 × 49 mm

- LED luminaire with LGP (Light Guide Panel) technology designed for indoor lighting
- Construction of luminaire suitable for suspended or surfaced mounting
- Body of luminaire made of powder coated slim aluminium profile
- Diffuser made of "slim opal" or "slim prism" for high glare limitation
- Luminaire equipped with electronic or dimmable electronic ballast
- Possibility to fit an emergency module
- Usage: offices, schools, interiors of buildings, commercial rooms, other interiors
- Accessories to be ordered separately

Product description

Product code
0-264505.080

Optics
Slim opal

Dimension a
1195 mm

Dimension c
49 mm

Total power consumption
41 W

Color temperature
4000 K

Mounting type
surface mounted, suspended

Weight
5.1 kg

Driver
EVG

Colour
white


Dimension b
295 mm

Type of light source
LED

Luminous flux
5928 lm

Color index (RA)
80

Cover
IP 20

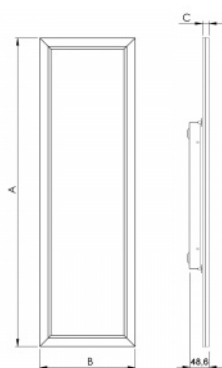

Photometry

