

MINNI LED - U FULL OPAL

series: MINNI



 Led lights

 Direct

 IP 20

 Surface mounted

2817 × 46 × 53 mm

Design surface mounted or suspended LED luminaires
Body made of aluminium profile MINNI, anodized or powder coated
Electronic or dimmable electronic ballast
Possibility of making continuous lines of particular modules
Accessories to be ordered separately



Product description

Product code
0-103340.000

Optics
acrylic satin diffuser

Dimension a
2817 mm

Dimension c
53 mm

Total power consumption
58

Color temperature
3000 K

Mounting type
surface mounted, suspended

Cover
IP 20

Driver
EVG

Colour
white

Dimension b
46 mm

Type of light source
LED

Luminous flux
7960 lm

Color index (RA)
80

Note
Autonomous luminaire

Weight
4.8


Photometry

MINNI LED - U FULL OPAL - 2817 x 46 x 53 mm



EDDGE WALL T5 HIGH

series: EDDGE

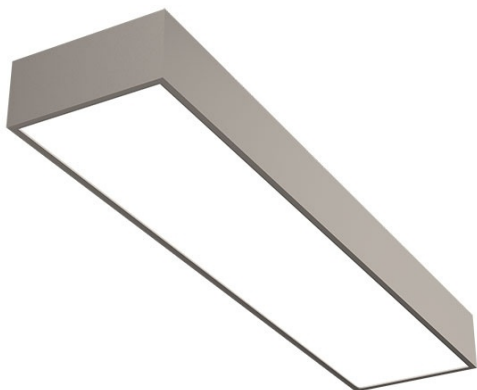

Direct and indirect



IP 20


Mounting on wall

590 × 200 × 85 mm

Wall luminaires for fluorescent tubes
Body made of extruded aluminium profile
Diffuser made of satin plexi for high-comfort soft light diffusion or microprismatic structure for glare reduction
Brushed aluminium or powder coated finish
Electronic or dimmable electronic ballast
Accessories to be ordered separately



Photometry

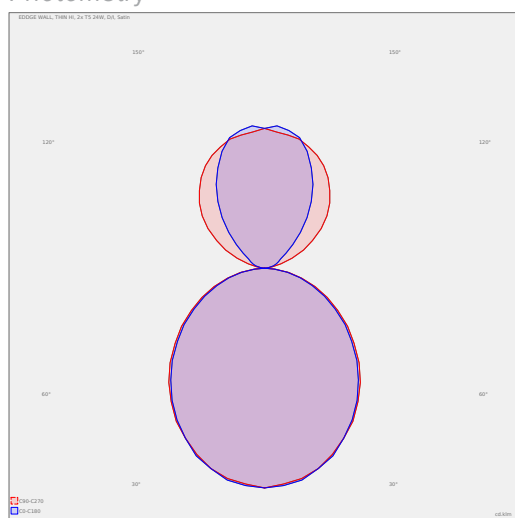

Product description

Product code
0-140894.305

Optics
acrylic satin diffuser

Dimension a
590 mm

Dimension c
85 mm

Lamp caps
G5

Mounting type
mounting on wall,

Weight
3.3

Driver
Analog 1-10V

Colour
brushed elox

Dimension b
200 mm

Type of light source
T5

Total power consumption
48

Cover
IP 20

Designed for
interior

AERRO VI LED - FULL SQ

series: AERRO



LED Led lights

IP 20 IP 20

Recessed Recessed

620 × 620 × 25 mm

Recessed office LED luminaire

The construction of luminaire designed for compartment ceiling M600 and M625

Body of luminaire made of white powder coated steel sheet (RAL 9003)

L80/B20 > 60000h


Diffuser made of microprism PMMA

Diffusing systems meet the glare reducing level UGR < 19

Colour temperature 4000k, other temperatures on request

Luminaire equipped with electronic or dimmable electronic ballast

Usage: offices, schools, interior of buildings, commercial rooms, other interiors

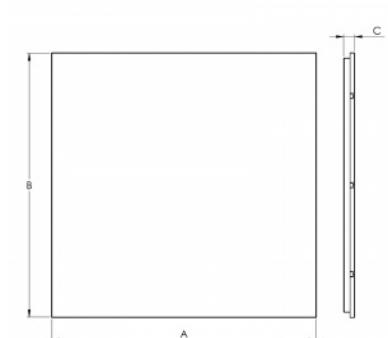

Product description

Product code
0-258121.010

Optics
Microprismatic diffuser

Dimension a
620 mm

Dimension c
25 mm

Total power consumption
33

Color temperature
4000 K

Mounting type
recessed,

Weight
5.3

Driver
EVG

Colour
white

Dimension b
620 mm

Type of light source
LED

Luminous flux
4500 lm

Color index (RA)
80

Cover
IP 20

Photometry

AERRO VI LED - FULL SQ - 620 x 620 x 25 mm

