



MINNI LED - DOWN

series: MINNI



Led lights



Direct



IP 20



Surface mounted

1412 × 46 × 53 mm

Design surface mounted or suspended LED luminaires
Body made of aluminium profile MINNI, anodized or powder coated
Electronic or dimmable electronic ballast
Possibility of making continuous lines of particular modules
Accessories to be ordered separately

Product description

Product code
0-101529.000

Optics
acrylic satin diffuser

Dimension a
1412 mm

Dimension c
53 mm

Total power consumption
29

Color temperature
4000 K

Mounting type
surface mounted, suspended

Cover
IP 20

Driver
EVG

Colour
white

Dimension b
46 mm

Type of light source
LED

Luminous flux
4170 lm

Color index (RA)
80

Note
Autonomous luminaire

Weight
2.5

Photometry

MINNI LED - DOWN - 1412 x 46 x 53 mm





MINNI LED - DOWN

series: MINNI

LED Led lights

Direct Direct

IP 20 IP 20

Surface mounted Surface mounted

2817 × 46 × 53 mm

Design surface mounted or suspended LED luminaires
Body made of aluminium profile MINNI, anodized or powder coated
Electronic or dimmable electronic ballast
Possibility of making continuous lines of particular modules
Accessories to be ordered separately

Product description

Product code

0-101543.000

Driver

EVG

Optics

acrylic satin diffuser

Colour

white

Dimension a

2817 mm

Dimension b

46 mm

Dimension c

53 mm

Type of light source

LED

Total power consumption

114

Luminous flux

15970 lm

Color temperature

4000 K

Color index (RA)

80

Mounting type

surface mounted, suspended

Note

Autonomous luminaire

Cover

IP 20

Weight

4.8


Photometry

MINNI LED - DOWN - 2817 x 46 x 53 mm



PLANNE IP65 LED

series: PLANNE



994 × 420 × 55 mm

LED luminaire designed for indoor lighting

Construction of luminaire suitable for suspending

Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list

LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number


Optics 84-35° is especially suitable for illumination of corridors

Luminaire suitable to rooms with high mounting heights

Luminaire equipped with electronic or dimmable electronic ballast

Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations

Accessories to be ordered separately

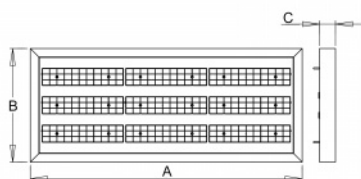

Product description

Product code
0-255008.000

Optics
25° LED optics

Dimension a
994 mm

Dimension c
55 mm

Total power consumption
113

Color temperature
4000 K

Mounting type
suspended,

Weight
11.9

Driver
EVG

Colour
white

Dimension b
420 mm


Type of light source
LED

Luminous flux
15813 lm

Color index (RA)
80


Cover
IP 65

Photometry

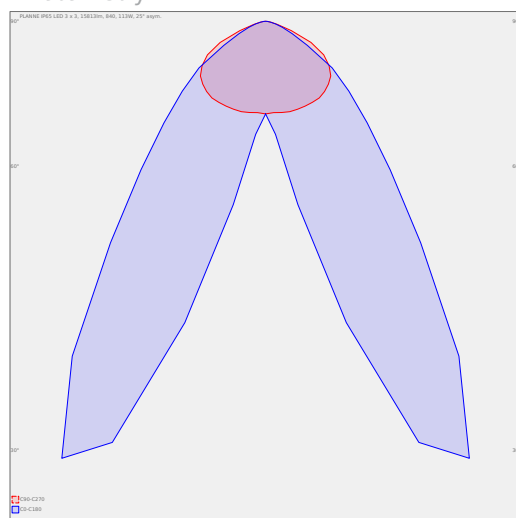

PLANNE IP65 LED

series: PLANNE



700 × 420 × 55 mm

LED luminaire designed for indoor lighting

Construction of luminaire suitable for suspending

Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list

LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number


Optics 84-35° is especially suitable for illumination of corridors

Luminaire suitable to rooms with high mounting heights

Luminaire equipped with electronic or dimmable electronic ballast

Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations

Accessories to be ordered separately

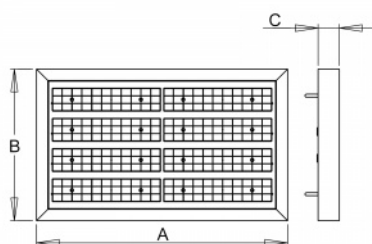

Product description

Product code

0-255011.000

Driver

EVG

Optics

25° LED optics

Colour

white

Dimension a

700 mm

Dimension b

420 mm

Dimension c

55 mm

Type of light source

LED

Total power consumption

100

Luminous flux

13416 lm

Color temperature

3000 K

Color index (RA)

80

Mounting type

suspended,


Cover

IP 65

Weight

8.8

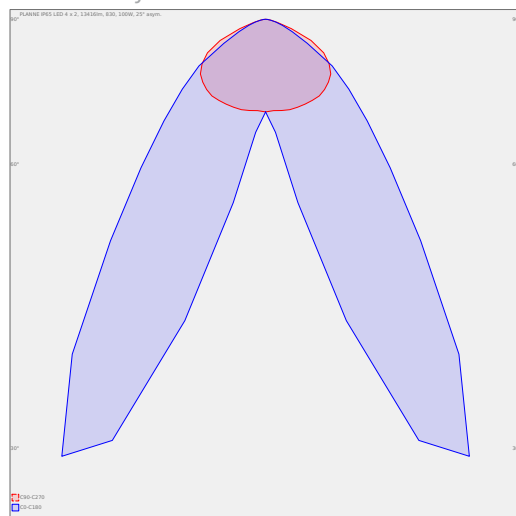


Photometry



PLANNE IP65 LED


series: PLANNE



-  Led lights
-  IP 65
-  Suspended

1582 × 420 × 55 mm

LED luminaire designed for indoor lighting
 Construction of luminaire suitable for suspending
 Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list
 LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number
 Optics 84-35° is especially suitable for illumination of corridors
 Luminaire suitable to rooms with high mounting heights
 Luminaire equipped with electronic or dimmable electronic ballast
 Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations
 Accessories to be ordered separately

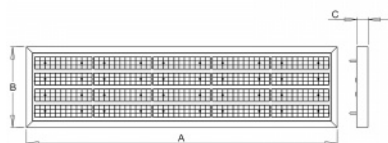

Product description

Product code
0-255022.000

Optics
25° LED optics

Dimension a
1582 mm

Dimension c
55 mm

Total power consumption
213

Color temperature
4000 K

Mounting type
suspended,

Weight
24

Driver
EVG

Colour
white

Dimension b
420 mm


Type of light source
LED

Luminous flux
30560 lm

Color index (RA)
80


Cover
IP 65

Photometry

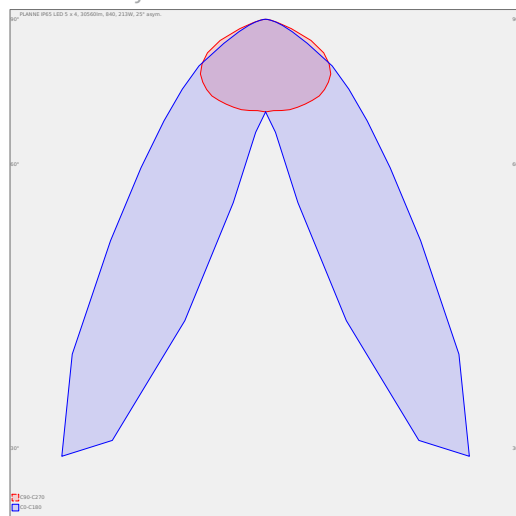

PLANNE IP65 LED

series: PLANNE



994 × 420 × 55 mm

LED luminaire designed for indoor lighting

Construction of luminaire suitable for suspending

Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list

LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number


Optics 84-35° is especially suitable for illumination of corridors

Luminaire suitable to rooms with high mounting heights

Luminaire equipped with electronic or dimmable electronic ballast

Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations

Accessories to be ordered separately

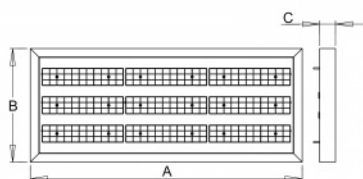

Product description

Product code
0-255048.000

Optics
30° LED optics

Dimension a
994 mm

Dimension c
55 mm

Total power consumption
113

Color temperature
4000 K

Mounting type
suspended,

Weight
11.9

Driver
EVG

Colour
white

Dimension b
420 mm


Type of light source
LED

Luminous flux
15813 lm

Color index (RA)
80


Cover
IP 65

Photometry

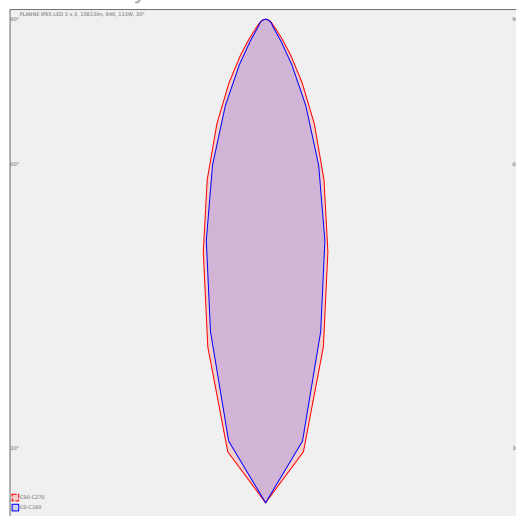

PLANNE IP65 LED

series: PLANNE



1582 × 420 × 55 mm

LED luminaire designed for indoor lighting

Construction of luminaire suitable for suspending

Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list

LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number


Optics 84-35° is especially suitable for illumination of corridors

Luminaire suitable to rooms with high mounting heights

Luminaire equipped with electronic or dimmable electronic ballast

Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations

Accessories to be ordered separately

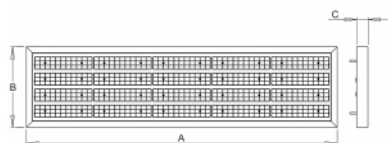

Product description

Product code
0-255061.000

Optics
30° LED optics

Dimension a
1582 mm

Dimension c
55 mm

Total power consumption
213

Color temperature
3000 K

Mounting type
suspended,

Weight
24

Driver
EVG

Colour
white

Dimension b
420 mm


Type of light source
LED

Luminous flux
29180 lm

Color index (RA)
80


Cover
IP 65

Photometry

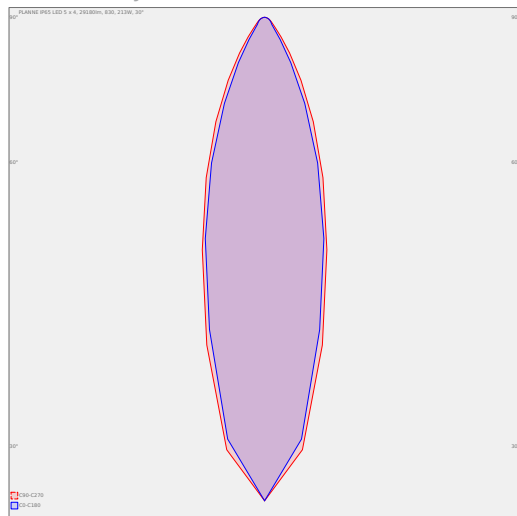

PLANNE IP65 LED

series: PLANNE



700 × 420 × 55 mm

LED luminaire designed for indoor lighting

Construction of luminaire suitable for suspending

Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list

LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number


Optics 84-35° is especially suitable for illumination of corridors

Luminaire suitable to rooms with high mounting heights

Luminaire equipped with electronic or dimmable electronic ballast

Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations

Accessories to be ordered separately

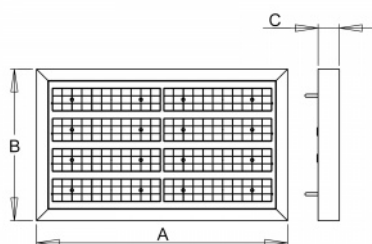

Product description

Product code
0-255092.000

Optics
60° LED optics

Dimension a
700 mm

Dimension c
55 mm

Total power consumption
100

Color temperature
4000 K

Mounting type
suspended,

Weight
8.8

Driver
EVG

Colour
white

Dimension b
420 mm


Type of light source
LED

Luminous flux
14056 lm

Color index (RA)
80


Cover
IP 65

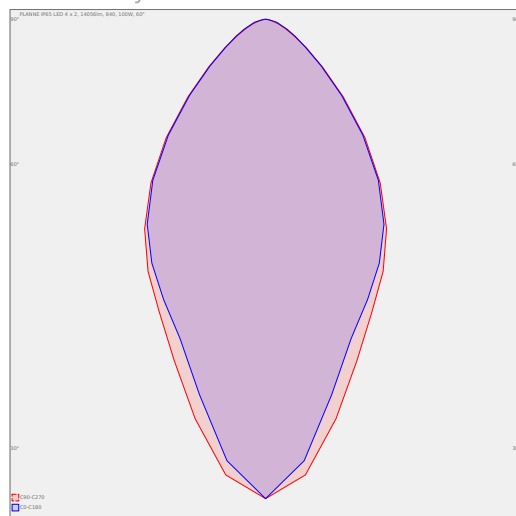


Photometry



PLANNE IP65 LED

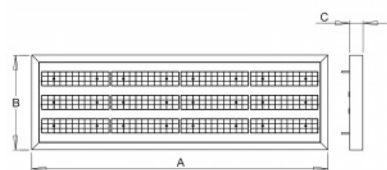series: PLANNE



-  Led lights
-  IP 65
-  Suspended

1287 × 420 × 55 mm

LED luminaire designed for indoor lighting

Construction of luminaire suitable for suspending

Body of luminaire made of steel sheet covering frame made of aluminium profile, both powder coated according to RAL colour list

LED optics - 60°, 90°, 25°, 30° and 84-35° are optional according to order number

Optics 84-35° is especially suitable for illumination of corridors

Luminaire suitable to rooms with high mounting heights

Luminaire equipped with electronic or dimmable electronic ballast

Usage: industry, warehouses, rack warehouses, high halls, low halls, garages, sport places, fuel stations

Accessories to be ordered separately

Product description

Product code

0-255173.000

Driver

EVG

Optics

84°-35° LED optics

Colour

white

Dimension a

1287 mm

Dimension b

420 mm

Dimension c

55 mm

Type of light source

LED

Total power consumption

128

Luminous flux

17508 lm

Color temperature

3000 K

Color index (RA)

80

Mounting type

suspended,


Cover

IP 65

Weight


17.5

Photometry

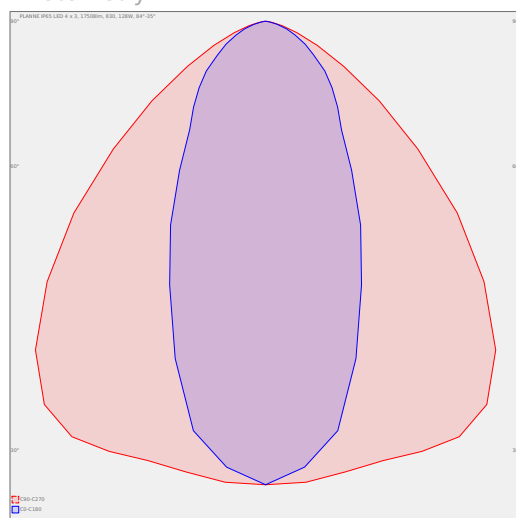


MIDDLE LED RECESSED - FRAMELESS ALIGNED

series: MIDDLE

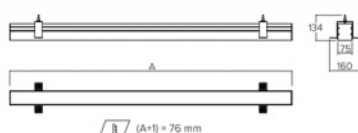

Photometry

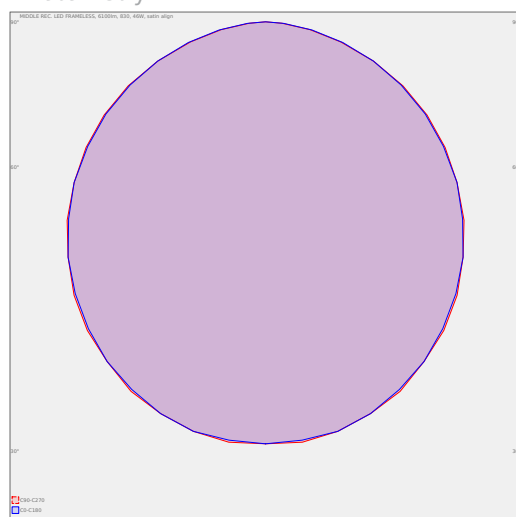

LED Led lights

Direct

IP 20

Recessed

1130 × 75 × 134 mm

Design recessed LED luminaires without frame
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105456.200

Optics
acrylic satin diffuser

Dimension a
1130 mm

Dimension c
134 mm

Type of light source
LED

Luminous flux
6100 lm

Color index (RA)
80

Cover
IP 20

Driver
DALI / SwitchDim

Colour
white

Dimension b
75 mm

Ceiling recessed
(A + 1 mm) x 76 mm

Total power consumption
46


Color temperature
3000 K

Mounting type
recessed,

Weight
2.5

MIDDLE LED RECESSED - FRAMELESS EXTENDED

series: MIDDLE

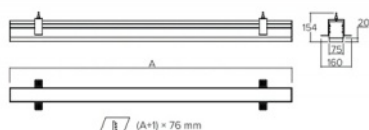

LED Led lights

Direct

IP 20

Recessed

570 × 75 × 134 mm

Design recessed LED luminaires without frame
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105851.200

Optics
acrylic satin diffuser

Dimension a
570 mm

Dimension c
134 mm

Type of light source
LED

Luminous flux
1668 lm

Color index (RA)
80

Note
Extended plexi

Weight
1.3

Driver
DALI / SwitchDim

Colour
white

Dimension b
75 mm

Ceiling recessed
(A + 1 mm) x 76 mm


Total power consumption
12

Color temperature
4000 K

Mounting type
recessed,


Cover
IP 20

Photometry

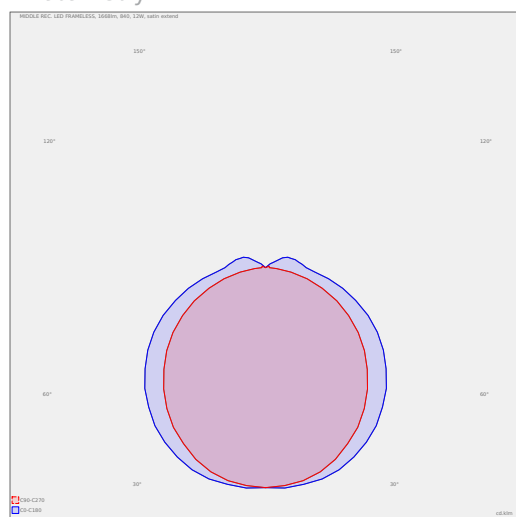


MIDDLE LED RECESSED - FRAMELESS EXTENDED

series: MIDDLE

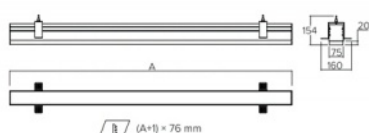

Photometry

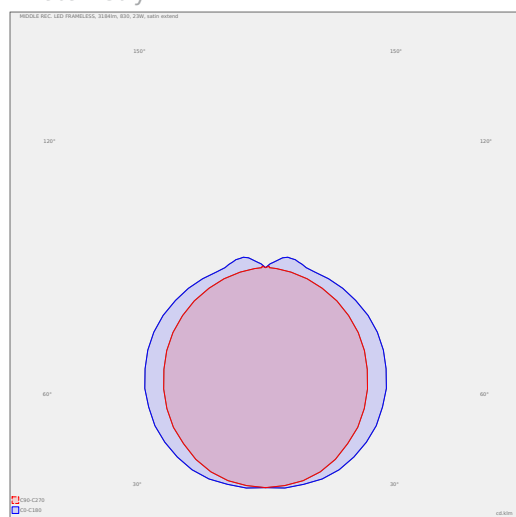

LED Led lights

Direct Direct

IP 20 IP 20

Recessed Recessed

1130 × 75 × 134 mm

Design recessed LED luminaires without frame
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105854.200

Optics
acrylic satin diffuser

Dimension a
1130 mm

Dimension c
134 mm

Type of light source
LED

Luminous flux
3184 lm

Color index (RA)
80

Note
Extended plexi

Weight
2.5

Driver
DALI / SwitchDim

Colour
white

Dimension b
75 mm

Ceiling recessed
(A + 1 mm) x 76 mm

Total power consumption
23

Color temperature
3000 K

Mounting type
recessed,

Cover
IP 20