


MIDDLE T5 - EXTENDED

series: MIDDLE

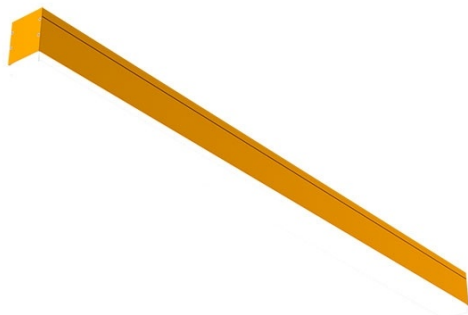


584 × 75 × 108 mm

Design surface mounted or suspended luminaires for T5 fluorescent lamps
Body made of aluminium profile MIDDLE, anodized or powder coated
Electronic or dimmable electronic ballast
Accessories to be ordered separately



Photometry

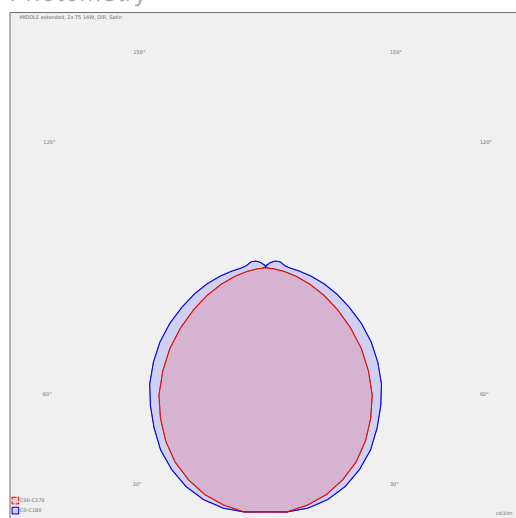

Product description

Product code
0-105718.30U

Optics
acrylic satin diffuser

Dimension a
584 mm

Dimension c
108 mm

Lamp caps
G5

Mounting type
surface mounted, suspended

Cover
IP 20

Designed for
interior

Driver
Analog 1-10V

Colour
broom yellow

Dimension b
75 mm

Type of light source
T5



Total power consumption
28

Note
Extended plexi

Weight
1.2


MIDDLE T5 RECESSED - ALIGNED

series: MIDDLE

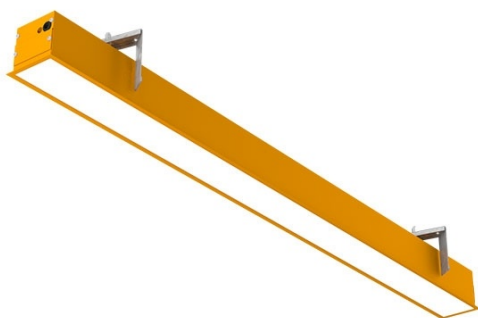


1176 × 89 × 134 mm

Design recessed luminaires for T5 fluorescent lamps
Body made of aluminium profile MIDDLE, anodized or powder coated
Electronic or dimmable electronic ballast
Accessories to be ordered separately



Photometry

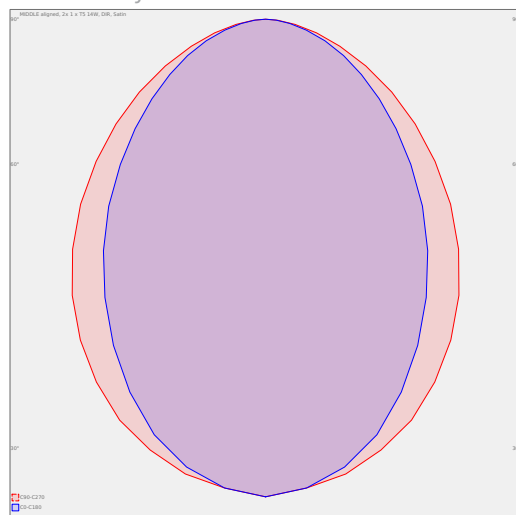

Product description

Product code
0-105109.30U

Optics
acrylic satin diffuser

Dimension a
1176 mm

Dimension c
134 mm

Type of light source
T5

Total power consumption
28

Cover
IP 20

Designed for
interior

Driver
Analog 1-10V

Colour
broom yellow

Dimension b
89 mm

Ceiling recessed
(A-10) × 80 mm


Lamp caps
G5

Mounting type
recessed,

Weight
2.5

MIDDLE T5 RECESSED - ALIGNED

series: MIDDLE



1776 × 89 × 134 mm

Design recessed luminaires for T5 fluorescent lamps
Body made of aluminium profile MIDDLE, anodized or powder coated
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105110.30U

Optics
acrylic satin diffuser

Dimension a
1776 mm

Dimension c
134 mm

Type of light source
T5

Total power consumption
42

Cover
IP 20

Designed for
interior

Driver
Analog 1-10V

Colour
broom yellow

Dimension b
89 mm

Ceiling recessed
(A-10) × 80 mm

Lamp caps
G5

Mounting type
recessed,


Weight
3.8

Photometry




MIDDLE LED SEMI-RECESSED - ALIGNED

series: MIDDLE



Photometry

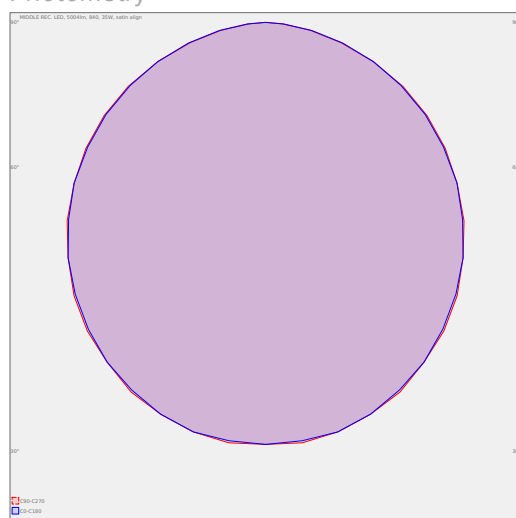

LED Led lights

Direct

IP 20

Recessed

1710 × 89 × 114 mm

Design semi-recessed LED luminaires

Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h

Electronic or dimmable electronic ballast

Accessories to be ordered separately

Product description

Product code

0-105265.200

Optics

acrylic satin diffuser

Dimension a

1710 mm

Dimension c

114 mm

Type of light source

LED

Luminous flux

5004 lm

Color index (RA)

80

Cover

IP 20

Driver

DALI / SwitchDim

Colour

white

Dimension b

89 mm

Ceiling recessed

(A-10) x 80mm

Total power consumption

35

Color temperature

4000 K

Mounting type



recessed,

Weight

3.8


MIDDLE T5 RECESSED - FRAMELESS ALIGNED

series: MIDDLE

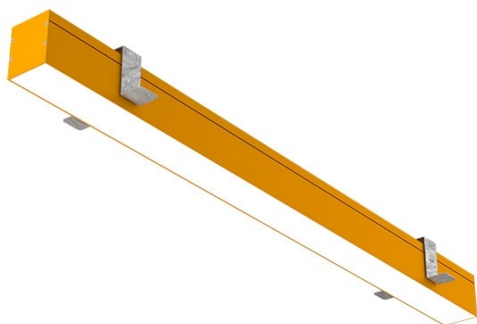

1764 × 75 × 134 mm

Design recessed luminaires without frame for T5 fluorescent lamps
Body made of aluminium profile MIDDLE, anodized or powder coated
Electronic or dimmable electronic ballast
Accessories to be ordered separately



Photometry



Product description

Product code
0-105410.30U

Optics
acrylic satin diffuser

Dimension a
1764 mm

Dimension c
134 mm

Type of light source
T5

Total power consumption
42

Cover
IP 20

Designed for
interior

Driver
Analog 1-10V

Colour
broom yellow

Dimension b
75 mm

Ceiling recessed
(A+1) x 76mm


Lamp caps
G5

Mounting type
recessed,

Weight
3.8


MIDDLE T5 RECESSED - FRAMELESS ALIGNED

series: MIDDLE

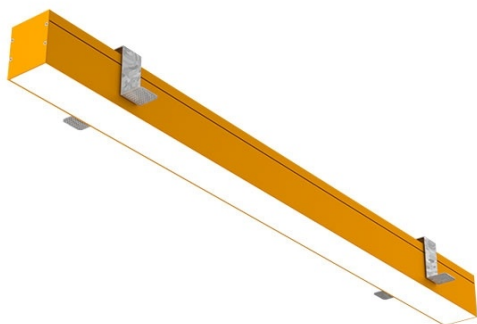


2964 × 75 × 134 mm

Design recessed luminaires without frame for T5 fluorescent lamps
Body made of aluminium profile MIDDLE, anodized or powder coated
Electronic or dimmable electronic ballast
Accessories to be ordered separately



Photometry

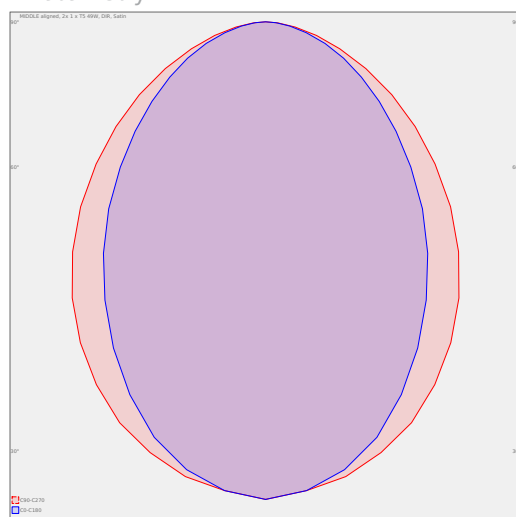

Product description

Product code
0-105416.30U

Optics
acrylic satin diffuser

Dimension a
2964 mm

Dimension c
134 mm

Type of light source
T5

Total power consumption
98

Cover
IP 20

Designed for
interior

Driver
Analog 1-10V

Colour
broom yellow

Dimension b
75 mm

Ceiling recessed
(A+1) x 76mm


Lamp caps
G5

Mounting type
recessed,

Weight
6.3

MIDDLE LED RECESSED - FRAMELESS EXTENDED

series: MIDDLE

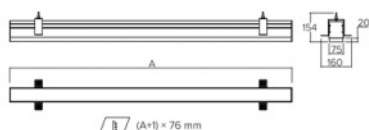

LED Led lights

Direct

IP 20

Recessed

1130 × 75 × 134 mm

Design recessed LED luminaires without frame
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105855.200

Optics
acrylic satin diffuser

Dimension a
1130 mm

Dimension c
134 mm

Type of light source
LED

Luminous flux
3336 lm

Color index (RA)
80

Note
Extended plexi

Weight
2.5

Driver
DALI / SwitchDim

Colour
white

Dimension b
75 mm

Ceiling recessed
(A + 1 mm) x 76 mm


Total power consumption
23

Color temperature
4000 K

Mounting type
recessed,


Cover
IP 20

Photometry

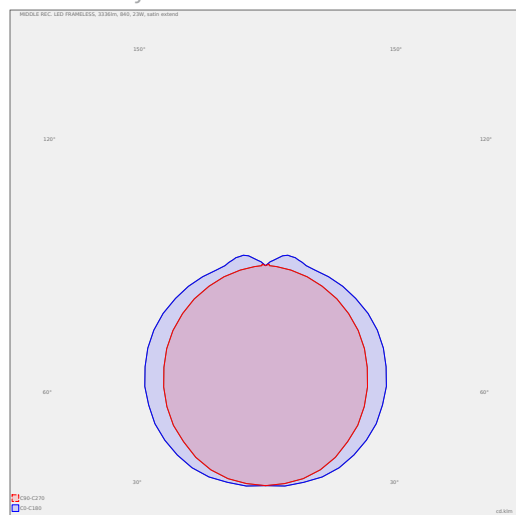


MIDDLE LED RECESSED - FRAMELESS EXTENDED

series: MIDDLE

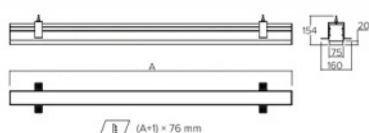

Photometry

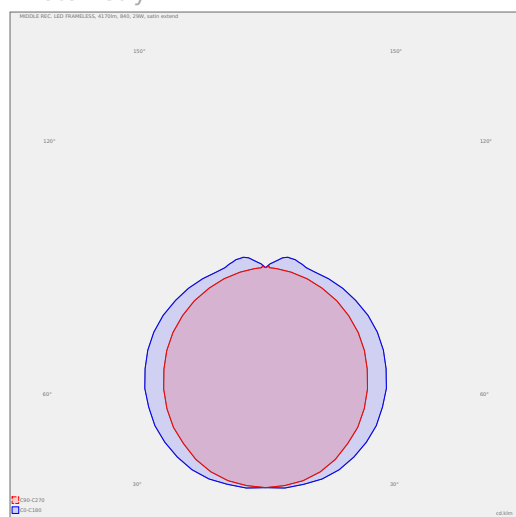

LED Led lights

Direct Direct

IP 20 IP 20

Recessed Recessed

1410 × 75 × 134 mm

Design recessed LED luminaires without frame
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105859.200

Optics
acrylic satin diffuser

Dimension a
1410 mm

Dimension c
134 mm

Type of light source
LED

Luminous flux
4170 lm

Color index (RA)
80

Note
Extended plexi

Weight
3.2

Driver
DALI / SwitchDim

Colour
white

Dimension b
75 mm

Ceiling recessed
(A + 1 mm) x 76 mm


Total power consumption
29

Color temperature
4000 K

Mounting type
recessed,

Cover
IP 20

series: MIDDLE

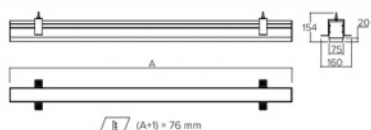


- 1690 × 75 × 134 mm**

Product description

Cover
IP 20

MIDDLE LED RECESSED - FRAMELESS EXTENDED

series: MIDDLE

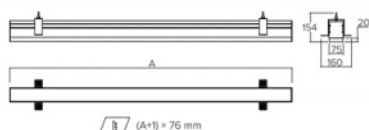

LED Led lights

Direct Direct

IP 20 IP 20

Recessed Recessed

2814 × 75 × 134 mm

Design recessed LED luminaires without frame
Body made of aluminium profile MIDDLE, anodized or powder coated
L80/B10 > 57000h | L80/B50 > 83000h
Electronic or dimmable electronic ballast
Accessories to be ordered separately

Product description

Product code
0-105872.200

Optics
acrylic satin diffuser

Dimension a
2814 mm

Dimension c
134 mm

Type of light source
LED

Luminous flux
15250 lm

Color index (RA)
80

Note
Extended plexi

Weight
6.2

Driver
DALI / SwitchDim

Colour
white

Dimension b
75 mm

Ceiling recessed
(A + 1 mm) x 76 mm

Total power consumption
114

Color temperature
3000 K

Mounting type
recessed,

Cover
IP 20

Photometry

