

## AERRO VI LED - DUO SQ

series: AERRO



 Led lights

 IP 20

 Recessed

**620 × 620 × 25 mm**

Recessed office LED luminaire

The construction of luminaire designed for compartment ceiling M600 and M625

Body of luminaire made of white powder coated steel sheet (RAL 9003)

L80/B20 > 60000h


Diffuser made of microprism PMMA

Diffusing systems meet the glare reducing level UGR < 19

Colour temperature 4000k, other temperatures on request

Luminaire equipped with electronic or dimmable electronic ballast

Usage: offices, schools, interior of buildings, commercial rooms, other interiors

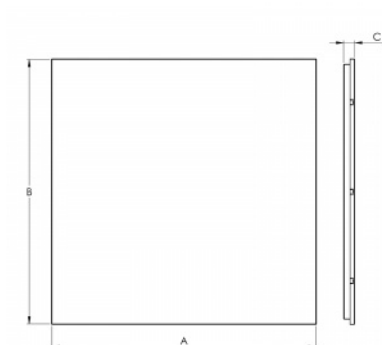

### Product description

Product code  
**0-258112.010**

Driver  
**EVG**

Optics  
**Microprismatic diffuser**

Colour  
**white**

Dimension a  
**620 mm**

Dimension b  
**620 mm**

Dimension c  
**25 mm**

Type of light source  
**LED**

Total power consumption  
**16**

Luminous flux  
**2300 lm**

Color temperature  
**4000 K**

Color index (RA)  
**80**

Mounting type  
**recessed,**

Cover  
**IP 20**

Weight  
**5.2**

### Photometry

AERRO VI LED - DUO SQ - 620 x 620 x 25 mm

