



## ARRC LED B SQ

series: ARRC



**595 × 595 × 70 mm**

Recessed LED luminaire designed for indoor lighting  
The construction of luminaire designed for mounting to compartment ceiling M600 and M625 or plasterboard  
Body of luminaire made of white powder coated steel sheet (RAL 9003)  
Diffuser made of satinic or microprismatic PMMA with high glare reduction level UGR<19  
Luminaire equipped with electronic or dimmable electronic ballast  
Colour temperature 4000 K, other temperatures on request  
Usage: offices, schools, interiors of buildings, commercial rooms, other interiors  
Accessories to be ordered separately

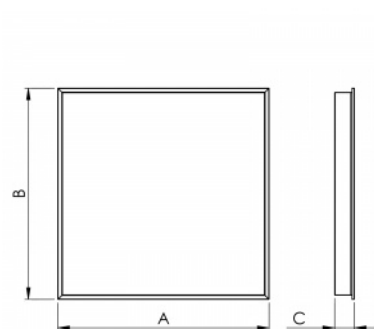

### Product description

Product code  
**0-259003.000**

Optics  
**acrylic satin diffuser**

Dimension a  
**595 mm**

Dimension c  
**70 mm**

Type of light source  
**LED**

Luminous flux  
**5860 lm**

Color index (RA)  
**80**

Cover  
**IP 20**

Driver  
**EVG**

Colour  
**white**

Dimension b  
**595 mm**

Ceiling recessed  
**581x581**

Total power consumption  
**48 W**

Color temperature  
**4000 K**

Mounting type  
**recessed,**

Weight  
**5.3 kg**

### Photometry

ARRC LED B SQ - 595 x 595 x 70 mm

